


Type: DC 63125-XXXX



Typ	2401	3201	4801	6001
Nennspannung (V)	24	32	48	60
Leerlaufdrehzahl (rpm)	3500	3800	3500	3500
Leerlaufstrom (A)	0,4	0,3	0,22	0,2
Nendrehzahl (rpm)	3100	3400	3100	3100
Nennmoment (Ncm)	27	25	29	32
Nennstrom (A)	4,4	3,1	2,5	2,3
Anhaltmoment (Ncm)	260	230	290	300
Anhaltestrom (A)	40	27,8	22,5	20,2
opt.Wirkgrad (%)	70,5	78	77	74
<b>Motorkenndaten</b>				
Anschlusswiderstand ( $\Omega$ )	k.A	k.A	k.A	k.A
Drehmomentkonstante (Ncm/A)	6,1	8,1	11,6	13,9
Drehzahlkonstante (rpm / V)	145,8	118,75	72,9	58,3

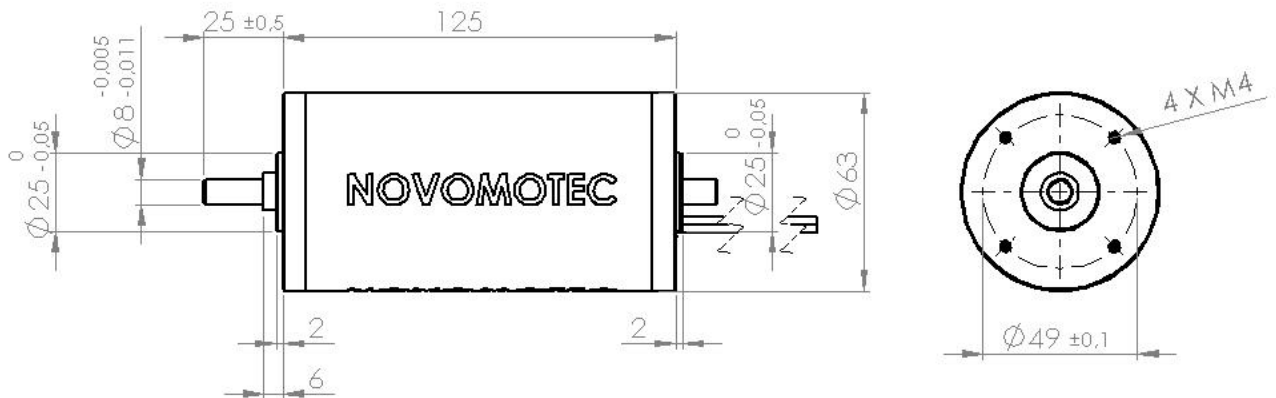